

# SPEAKMAN®

## Eyesaver® Laboratory Widespread Faucet with Integrated Eyewash

SEF-1800-CA

SPECIFICATION



### EYEWASH FEATURES:

- Pull handle activator
- Aerated yellow plastic spray outlets with flip-top dust caps
- 2.87 gpm @30 psi performance

### COMPLIANCE:

- ANSI/ISEA Z358.1 certified

### FAUCET FEATURES:

- Gooseneck faucet with independently operated eyewash
- Lead-free brass construction
- ¼ turn ceramic cartridge
- ½ in. male connections for hot & cold inlets
- Adjustable center of 6 in. to 12 in.
- Vandal resistant 4 in. wrist blades handles with color-coded indexes or single handle lever
- 2.6 gpm flow rate

### COMPLIANCE:

- ASME A112.18.1/CSA B125 and NSF 372

### OPTIONS:

ADD SUFFIX TO MODEL #

- 8 in. gooseneck spout -8
- Vandal resistant 0.5 gpm flow control -BO
- Foot pedal activation (not NSF 372 compliant) -FP
- Laminar flow outlet 1.5 gpm -LF
- Serrated tip with vacuum breaker (not NSF 372 compliant) -ST
- Non-aerated eyewash -NA
- Two handle valves replaced with single lever valve -SL
- Thermostatic mixing valve for eyewash -TW

### WARRANTY:

- 25 year for ceramic cartridges
- 1 year limited

SEE REVERSE FOR ROUGH-IN DIMENSIONS

THIS SPACE FOR ARCHITECT/ENGINEER APPROVAL.

# SPEAKMAN®

400 ANCHOR MILL ROAD | NEW CASTLE, DE 19720  
P: 800-537-2107 | F: 800-977-2747  
WWW.SPEAKMANCOMPANY.COM

REVISION DATE: JUNE 2014




Management Systems  
Registered to ISO 9001

527

# SPEAKMAN®

## Eyesaver® Laboratory Widespread Faucet with Integrated Eyewash SEF-1800-CA

SPECIFICATION

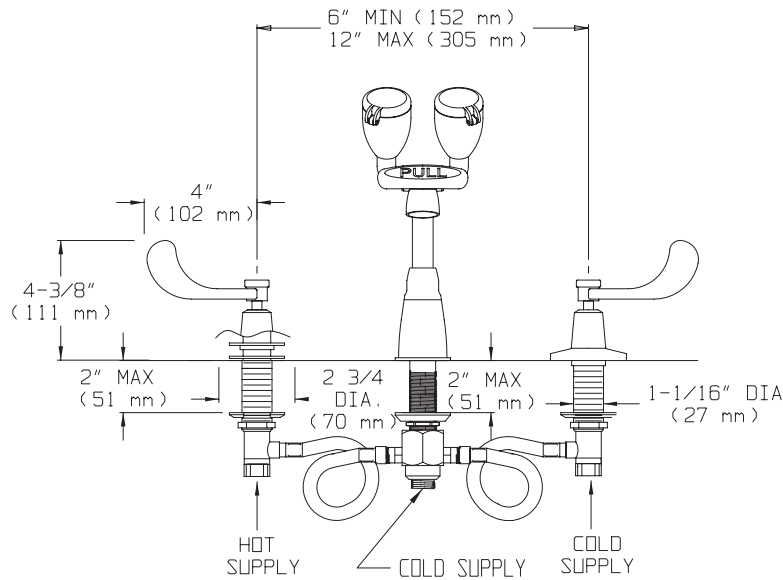

NOTE: 1. All dimensions are in inches (millimeters) unless otherwise specified and are subject to change without notice.

THIS SPACE FOR ARCHITECT/ENGINEER APPROVAL.

# SPEAKMAN®

400 ANCHOR MILL ROAD | NEW CASTLE, DE 19720  
P: 800-537-2107 | F: 800-977-2747  
WWW.SPEAKMANCOMPANY.COM



Management Systems  
Registered to ISO 9001

REVISION DATE: JUNE 2014